




Pump Technology main catalog

DP.Gera Pump Series





Pump Technology main catalog

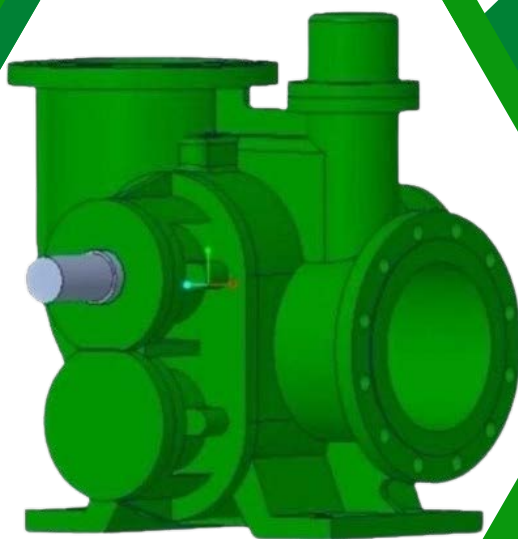

4" GEAR PUMP PROPERTIES

Capacity	Speed	Pressure 4 BAR	Pressure 10 BAR	Viscosity
40	250	11 kW	15 kW	25 000 SSU
50	300	15 kW	18.5 kW	7 500 SSU
65	400	18.5 kW	22 kW	2 500 SSU
76	450	22 kW	22 kW	750 SSU
86	500	30 kW	30 kW	100 SSU

Temperature of Pumped liquid

0 - 250 °C

METERIAL OPTIONS

- Pump Body, covers and gears: Cast iron, Steel cast, stainless AISI 304 / 316
- Bearings: Snbz 12 bornze, bearing, carbon graphite, Ina bushing bearing.
- Sealing: Soft seal, mechanical seal



Pump Technology main catalog



6" GEAR PUMP PROPERTIES

Capacity	Speed	Pressure 4 BAR	Pressure 8 BAR	Viscosity
75	250	22 kW	30 kW	25 000 SSU
90	300	30 kW	37 kW	7 500 SSU
120	400	37 kW	45 kW	2 500 SSU
140	450	45 kW	55 kW	750 SSU
160	500	55 kW	75 kW	100 SSU

Temperature of Pumped liquid


0 - 250 °C

METERIAL OPTIONS

- Pump Body, covers and gears: Cast iron, Steel cast, stainless AISI 304 / 316
- Bearings: Snbz 12 bornze, bearing, carbon graphite, Ina bushing bearing.
- Sealing: Soft seal, mechanical seal



Pump Technology main catalog

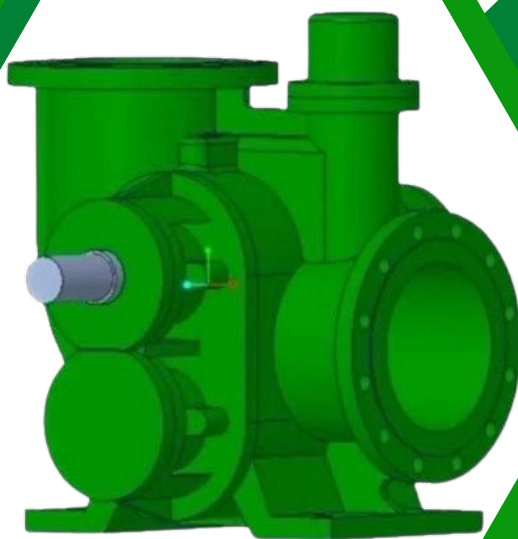

8" GEAR PUMP PROPERTIES

Capacity	Speed	Pressure 4 BAR	Pressure 8 BAR	Viscosity
120	250	45 kW	55 kW	25 000 SSU
150	300	55 kW	75 kW	7 500 SSU
180	400	75 kW	90 kW	2 500 SSU
200	450	90 kW	110 kW	750 SSU
250	500	110 kW	132 kW	100 SSU

Temperature of Pumped liquid

0 - 250 °C

METERIAL OPTIONS

- Pump Body, covers and gears: Cast iron, Steel cast, stainless AISI 304 / 316
- Bearings: Snbz 12 bornze, bearing, carbon graphite, Ina bushing bearing.
- Sealing: Soft seal, mechanical seal



Pump Technology main catalog



10" GEAR PUMP PROPERTIES

Capacity	Speed	Pressure 4 BAR	Pressure 8 BAR	Viscosity
160	250	55 kW	75 kW	25 000 SSU
200	300	75 kW	90 kW	7 500 SSU
250	400	90 kW	110 kW	2 500 SSU
280	450	110 kW	132 kW	750 SSU
320	500	132 kW	160 kW	100 SSU

Temperature of Pumped liquid

0 - 250 °C

METERIAL OPTIONS

- Pump Body, covers and gears: Cast iron, Steel cast, stainless AISI 304 / 316
- Bearings: Snbz 12 bornze, bearing, carbon graphite, Ina bushing bearing.
- Sealing: Soft seal, mechanical seal



Pump Technology main catalog



12" GEAR PUMP PROPERTIES

Capacity	Speed	Pressure 4 BAR	Pressure 8 BAR	Viscosity
200	250	90 kW	110 kW	25 000 SSU
240	300	110 kW	132 kW	7 500 SSU
280	400	132 kW	160 kW	2 500 SSU
360	450	160 kW	180 kW	750 SSU
520	500	180 kW	200 kW	100 SSU

Temperature of Pumped liquid

0 - 250 °C

METERIAL OPTIONS

- Pump Body, covers and gears: Cast iron, Steel cast, stainless AISI 304 / 316
- Bearings: Snbz 12 bornze, bearing, carbon graphite, Ina bushing bearing.
- Sealing: Soft seal, mechanical seal



Pump Technology main catalog

Türkiye / Konya
www.petropomsad.com
petropomsad@gmail.com
Aspak 2. Sanayi Karatay
+90 532 151 25 83
+90 555 148 89 02

