



Pump Technologies | Pompa Tehnologije

OH3 API 610 Series





Pump • Fire Fighting Units • Booster Set

OH3 API 610

IN-LINE PUMPS



Handled Liquids

Clean or slightly contaminated low viscosity liquids without solid & fibrous particles.

Technical Data

Discharge Flange _____ DN 50.....DN250 mm

Capacity _____ up to 800 m³/h

Head _____ up to 95 m

Speed _____ up 1500 to 3000 rpm

Operating Temperature _____ -10 °C to +140 °C

Casing Pressure (Pmax) _____ 10 bar (16 bar)

(Pmax: Suction Pressure + Shut off Head)

The Material of pumps differ according to the type of pumped liquid, operating temperature and pressure. Contact for detailed information.

Design Features

Volute casing, single stage, vertical in-line centrifugal pump with closed impeller and with separate own bearing bracket.

Suction and discharge flanges conform to EN 1092-2 / PN 16. (EN 1092-1 / PN 16 for steel or stainless steel casing)

OH 3 pumps are short coupled with electric motors of IEC frame sizes with high efficiency class.

Pump Designation

Pump Type _____

Suction and Discharge Nozzle (DN-mm) _____

Nominal Impeller Diameter (mm) _____



Due to the back-pull-out design, the complete bearing assembly including impeller and casing cover can be dismantled without removing the volute casing from the pipe system. (With spacer coupling application, also possible to take out the rotor group without dismantling the electric motor.)

All impellers are balanced dynamically or statically according to ISO 9001-2015

Axial thrust is balanced by impeller balancing holes system.

Direction of rotation is clockwise viewed from drive end.


Bearings of OH3 type pumps are full life time grease lubricated • ball bearings.

Shaft Sealing


Single mechanical seal, flushed by pumped liquid, uncooled and unbalanced.


OH3 **250** **430**

1450 rpm

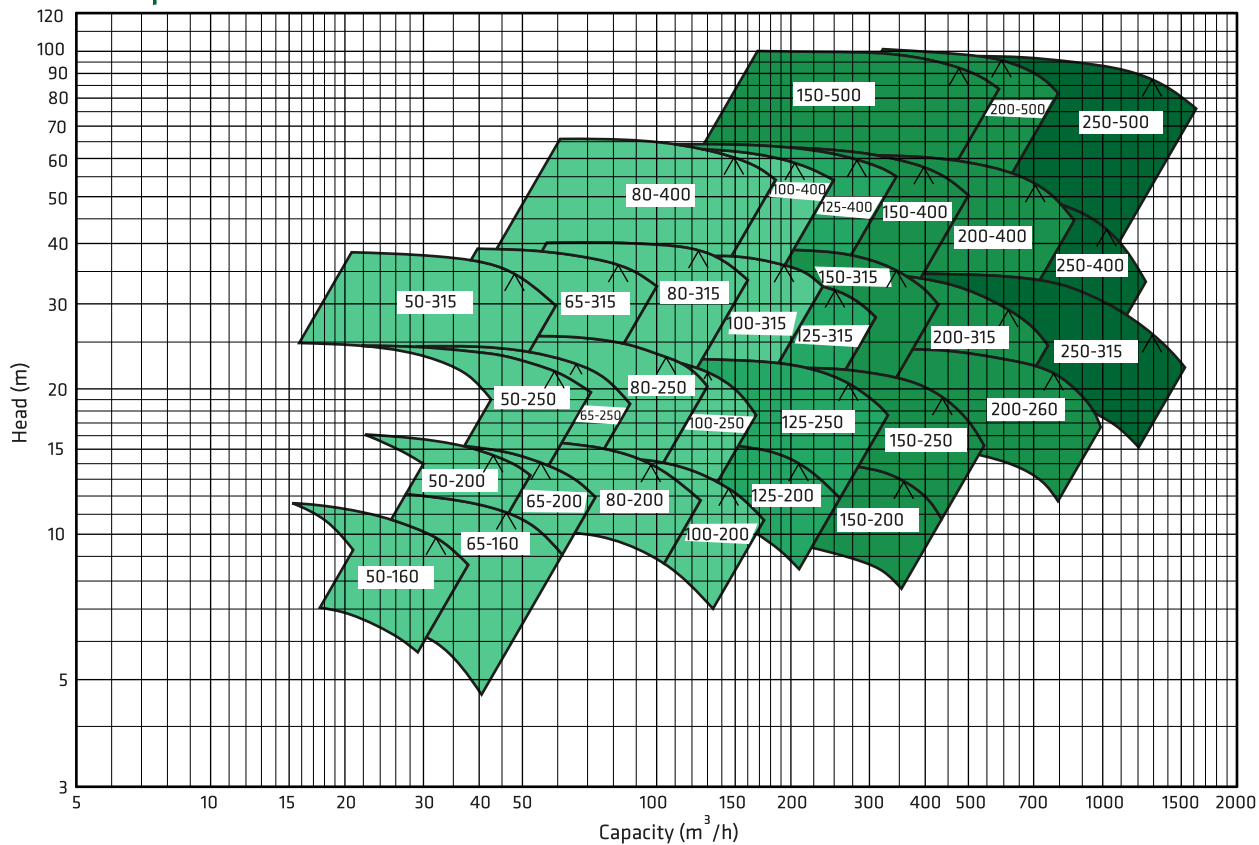

2900 rpm

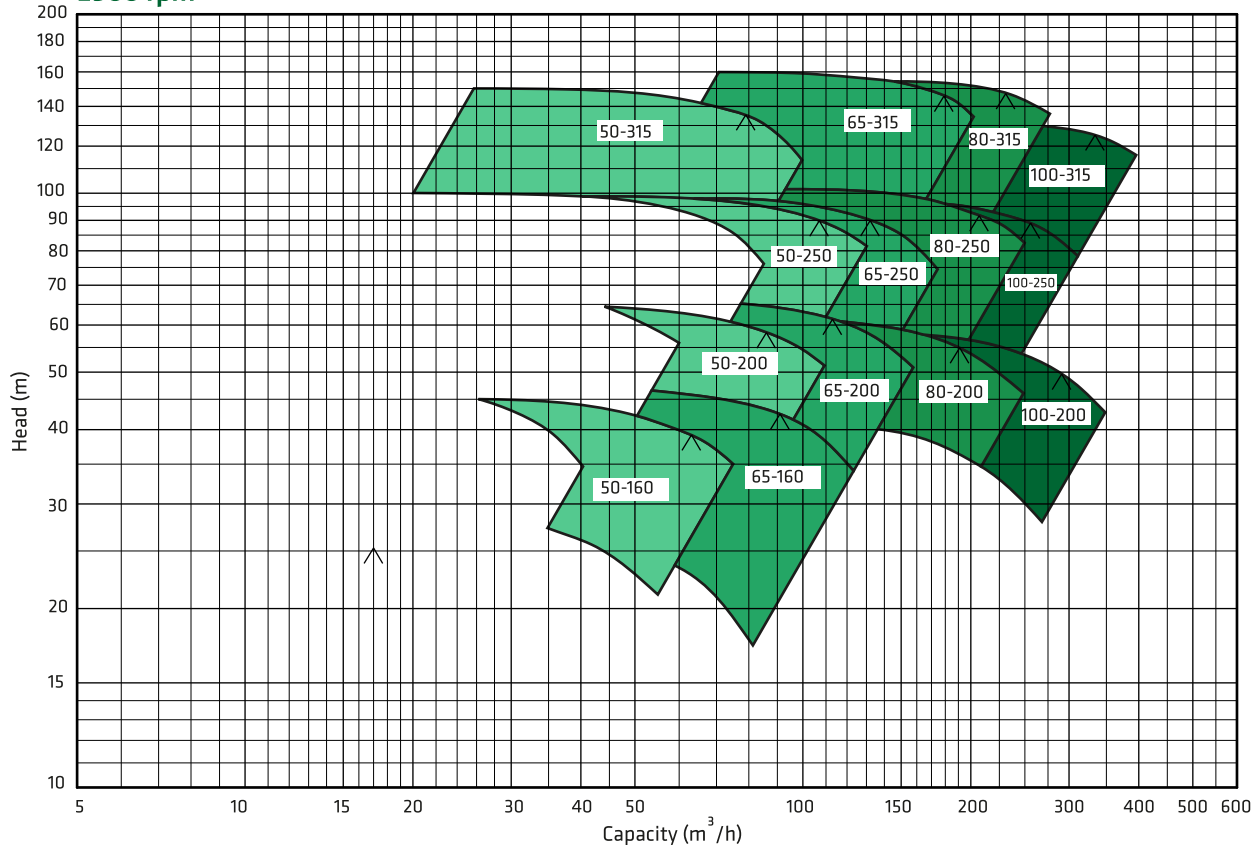

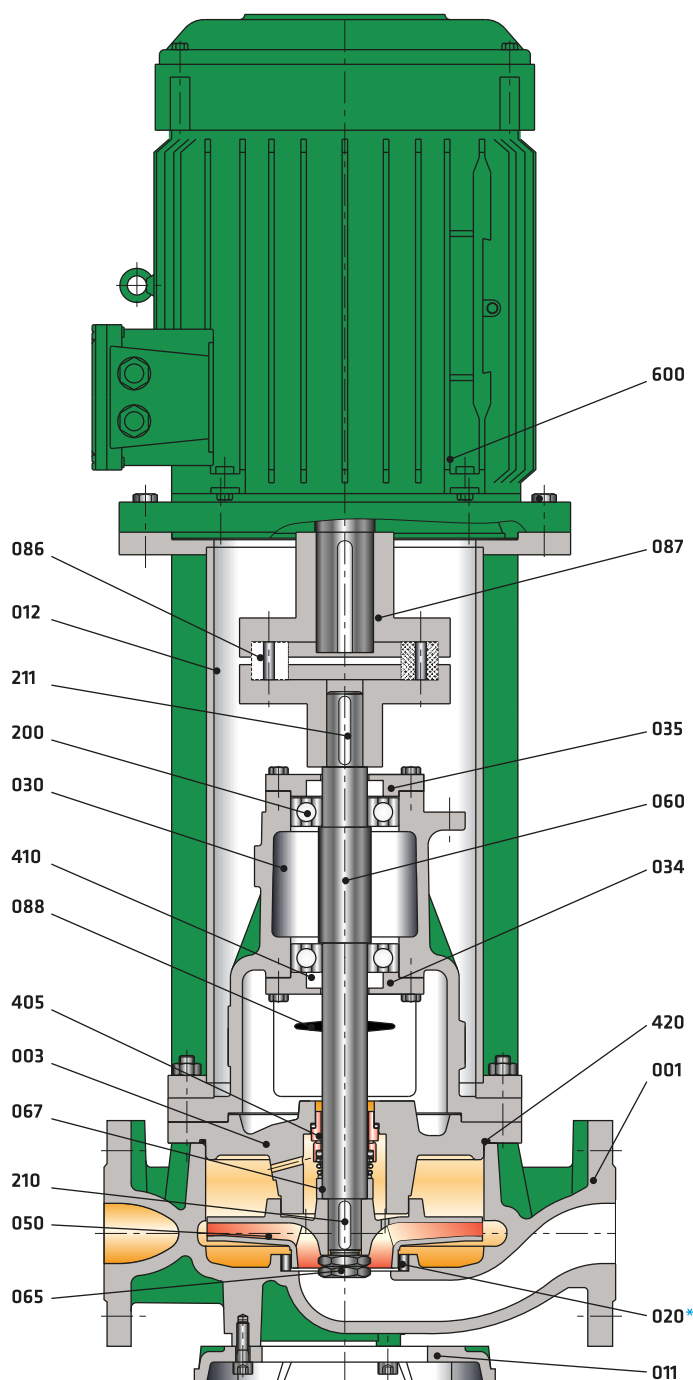

Part List

001	Volute Casing
003	Casing Cover
011	Base Plate
012	Motor Pedestal
020	Wear Ring
030	Bearing Bracket
034	Bearing Cover
035	Bearing Cover
050	Impeller
060	Pump Shaft
065	Impeller Nut
067	Spacer Sleeve
086	Coupling Rubber
087	Flexible Coupling
088	Thrower
200	Ball Bearing
210	Impeller Key
211	Coupling Key
405	Mechanical Seal
410	Lip Seal
420	O-Ring
600	Electric Motor

PART LIST	10	30	35	20	60	6L	70	7L	8M	7D	7S	8N	80	4C	4A	40	80	8T	60	7L	7E	7D
	0.6025	0.7040	0.7043	1.0619	1.4308	1.4309	1.4408	1.4409	1.4500	1.4517	1.4469	1.4317	1.4008	2.1050.01	2.0975.01	2.1096.01	1.4021	1.4021+QT	1.4301	1.4404	1.4460	1.4462
Volute Casing	●	○	○	○	○	○	○	○	○	○	○	○	○	○								
Casing Cover	●	○	○	○	○	○	○	○	○	○	○	○	○	○								
Impeller	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○					○	
Shaft																	●	○	○	○		○
Bearing Housing	●	○	○	○	○	○	○	○														
Wear Ring	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○						
Mechanical Seal (*)	EN 12756																					

Material Equivalents

Description	DIN / EN		AISI / SAE / ASTM
Cast Iron	0.6025	EN-GJL-250 (GG25)	A48 Class 40B
Nodular Cast Iron	0.7040	EN-GJS-400-15 (GGG40)	A536 60-40-18
Nodular Cast Iron	0.7043	EN-GJS-400-18-LT (GGG40.3)	A536 60-40-18
Cast Steel	1.0619	GP240GHGS-C25	A216 WCB
Chrome Nickel Cast Steel	1.4308	GX5CrNi19-10	A351 CF8
Chrome Nickel Cast Steel (low carbon)	1.4309	GX2CrNi19-11	A351 CF3
Chrome Nickel Molybdenum Cast Steel	1.4408	GX5CrNiMo19-11-2	A351 CF8M
Chrome Nickel Molybdenum Cast Steel (low carbon)	1.4409	GX2CrNiMo19-11-2	A351 CF3M
Austenitic Cast Steel	1.4500	GX7NiCrMoCuNb25-20	A351 CN7M
Austenitic - Ferritic Cast Steel (duplex)	1.4517	GX2CrNiMoCuN25-6-3-3	A890 CD4MCuN
Austenitic - Ferritic Cast Steel (super duplex)	1.4469	GX2CrNiMoN26-7-4	A890 CE3MN
Martenzitic Stainless Cast Steel	1.4317	GX4CrNi13-4	A352 CA6NM
Martenzitic Stainless Cast Steel	1.4008	GX7CrNiMo12-1	A217 CA15
Cast Bronze (tin alloy)	2.1050.01	G-CuSn10	B427 C90700
Cast Bronze (nickel alloy)	2.0975.01	G-CuAl10Ni	B148 C95500
Cast Bronze (lead)	2.1096.01	G-CuSn5ZnPb	B584 C83600
Chrome Steel	1.4021	X20Cr13	A276 Type 420
Chrome Steel(heat treated)	1.4021	X20Cr13	A276 Type 420+QT
Chrome Nickel Steel	1.4301	X5CrNi18-10	A276 Type 304
Chrome Nickel Steel (low carbon)	1.4404	X2CrNiMo17-12-2	A276 Type 316L
Duplex (austenitic-ferritic) Steel	1.4460	X3CrNiMoN27-5-2	AISI 329
Duplex (austenitic-ferritic) Steel	1.4462	X2CrNiMoN22-5-3	UNS S32205



TÜRKİYE / KONYA
www.petropomsad.com

+90 532 151 25 83

petropomsad@gmail.com
2. ASPAK SANAYİ KARATAY

+90 555 148 89 02